

# MODEL FM SIDE-MOUNTED FLOAT



### Features

- Simple installation
- Durable Float
- Stainless steel construction
- Reliability/Long switch life

### Approval

FM-11 is approved by NK (Japanese marine engineering classification), Approval No. 97 FV 705B. The specifications are the same except the maximum switch rating, 50VA 0.5A 240V AC or 50W 0.5A 240V DC.

### General Description

The FM series, side-mounted level switches, are manufactured specifically for level detection in clean liquids such as oils, water and chemicals. They are designed for horizontal mounting in a tank or vessel through flanged or threaded connections. To suit many different level sensing situations, a wide variety models are available.

### Specifications

Model	FM-11	FM-12
Description	Standard	Double contact
Drawing		
Mounting	JIS5K40A	
Switch Rating	50VA 0.5A 300V AC, 50W 0.5A 300V DC Max. (Resistive)	
Operating Temperature	-10°C to 120°C	
Maximum Pressure	500kPa / 5bar	
Material	Mounting	304SS
	Shaft and Float	316SS
	Housing	ADC12
Cable Entry	JIS F 20a (G3/4)	
Protection	IP44	
Minimum S.G.	0.7	
Life Expectancy	1 × 10 <sup>7</sup> Operations	

\*Middle S.G. of two liquids.

### Operational Description

The FM series contain a hermetically sealed reed switch within the stem or flange and a permanent magnet in the end of the shaft. As the float rises or falls with the liquid level, the magnet activates the reed switch. Changing the mounting orientation can reverse switch action. They work well as high or low level alarm or control for light-duty applications.

The FM series can be used in any non-hazardous tanks or vessels. However they can be used in hazardous location by connecting with intrinsic safety barriers. (Local approval for the combination system use of Intrinsic Safety standard is required.)

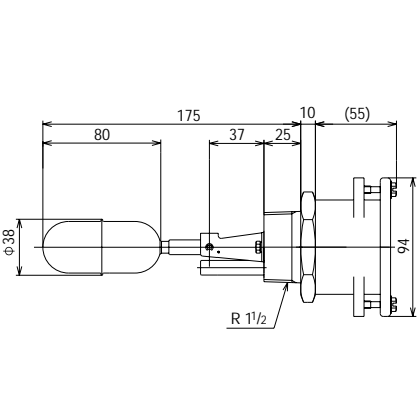
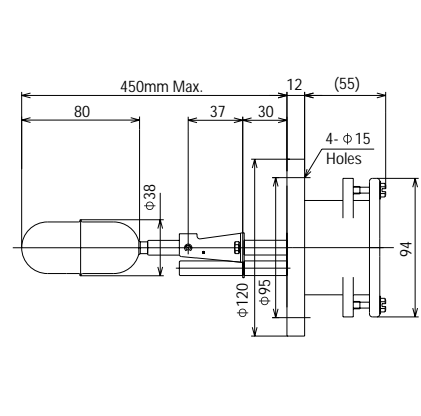
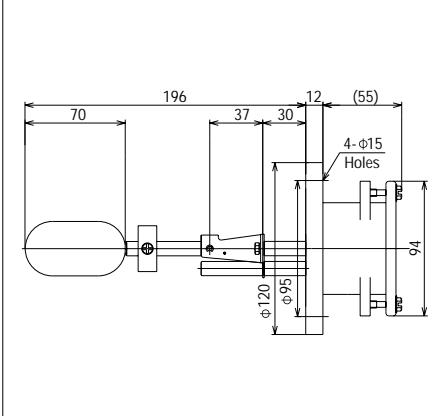
### Technical Note

To protect the reed switch against electrical surges, we recommend the use of our relay unit model RE7000. Please see the RE for details.

### Switching Level

	FM-11	FM-12		FM-13	FM-14	FM-16
ON	-3mm±3mm	-15mm+10mm (A, C terminal)	-10mm+15mm (B, C terminal)	-3mm±3mm	-3mm±3mm	-3mm±4mm
OFF	-12mm±3mm			-12mm±3mm	-12mm±3mm	-12mm±4mm

\*Distance from center line of flat.

FM-13 Thread mounting	FM-14 Long stem	FM-16 Interface detection
		
R1-1/2	JIS5K40A	
50VA 0.5A 300V AC, 50W 0.5A 300V DC Max. (Resistive)		
-10°C to 120°C		-10°C to 80°C
2.5kPa / 25bar	500kPa / 5bar	
304SS		
316SS		
ADC12		
JIS F 20a (G3/4)		
IP44		
0.7	0.72 to 1.0*	
1 × 10 <sup>7</sup> Operations		